



DeltaSingle™



Product Catalogue

AUSTRALIAN MADE FOR AN AUSTRALIAN LIFESTYLE

Delta Panels Pty Ltd

ABN: 11 147 861 292

E: info@deltapanel.com

W: www.deltapanel.com

Head Office: 731 Boundary Road, Richlands, Qld 4077

P: +61 7 3271 2170

Sydney Depot: 11 The Old Northern Road, Narellan, NSW 2567

P: +61 02 4611 7712

Version Date: 2024-06-21



SCI QUAL INTERNATIONAL



SCI QUAL INTERNATIONAL



SCI QUAL INTERNATIONAL



DeltaPanels™ PROUDLY OFFERS THE FOLLOWING WARRANTIES <







STRUCTURAL INTEGRITY - 20 YEARS
PAINT FINISH - 10 YEARS

CONDITIONS APPLY, PLEASE REFER TO THE FULL WARRANTY PROVISIONS AS LISTED ON OUR WEB PAGE.

DeltaSingle™ allows you to create the perfect outdoor entertaining area that enhances your lifestyle, and adds value to your property.



- The new DeltaLum™ LED lighting system and DeltaSkylight are easily to install as components of the DeltaSingle™ roofing system
- Kits are available for Single & Double Carports
- Cost effective and stylish patio system when combined with DeltaBeam™
- Clip-together modules make DeltaSingle™ perfect as a DIY project
- 300mm wide roof modules allow for easy handling and fast installation
- Deep roofing profile creates strength and allows for greater spans
- Ceiling profile combines the elegance of VJ panelling with a clean, modern appearance
- Available in popular high-gloss colours to complement your house
- Written 20 Year Warranty for true peace of mind

* Download technical data information from the Delta Panels™ website

Colour Range - DeltaSingle™		
ROOF COLOUR	CEILING COLOUR	
 Off White	 Off White	●*
 Smooth Cream	 Smooth Cream	●*
 Monolith	 Off White	●*

* Note:

DeltaSingle™ colours are 80% gloss level on the ceiling, standard gloss level on the roof.

Colour Range - DeltaBeam™		
 Off White	Off White	●*
 Ebony	Ebony	●*

Available in both Off White & Ebony as a standard colour, though a wide range of powder coated colours are available upon request.


** Note:

DeltaBeam™ is manufactured in 80% gloss colours.



Beam Information

Figure - Sheeting Profile

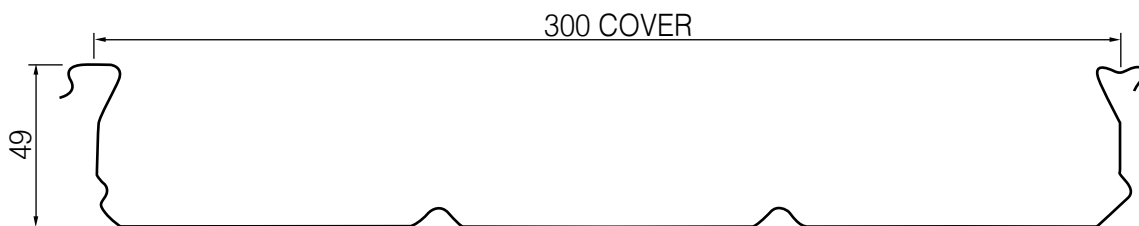

Material:

G550 0.48 BMT steel to AS 1397

General Notes:

1. Delta Single sheeting & DeltaBeam to be used for external non-habitable applications only.
2. Sheeting & beam spans are not adequate for any additional imposed loads, including foot traffic.
3. Design wind class is to be determined in accordance with AS 4055:2012 – Wind loads for housing.
4. Structural adequacy of the structure to which the sheeting and/or beam are attached is to be checked by a qualified engineer.
5. Any side of new roofing with more than 50% of clear area from ground to sheeting blocked is considered to be an enclosing wall.

DeltaSingle™

1. Minimum roofing slope to be 1°.
2. The minimum fixing requirements are 3/14g screws with cyclonic washers per sheet per support.
3. Allowable deflection limit for wind loading is span / 50.
4. Maintenance load of 0.5kN has been allowed for.
5. DeltaSingle™ is classified as a non-trafficable roof.
6. Maximum allowable overhang of sheeting is 30% of the adjacent span or 900mm, whichever is lesser.
7. 'Roof Span' is the maximum spacing of supports for sheeting.

Allowable Span (mm) for Delta Beams
Roof panel span of 6.5m with 1m overhang

Wind Class	N2	N3	N4	N5
100x1.0 Beam	3620	2820	2970	2300
150x1.2 Beam	4770	3640	3850	2920
200x1.2 Beam	5500	4110	4370	3220
250x1.6 Beam	7960	6500	6780	5270
300x1.6 Beam	8630	7000	7380	5490

Allowable Span (mm) for 0.48 BMT Delta Sheeting in non-cyclonic regions


Wind Class	Single-Span				Multi-Span			
	Cp,n				Cp,n			
	0.5	0.7	1	1.2	0.5	0.7	1	1.2
Patio Type	1P	1	2+4	3	1P	1	2+4	3
N1	5340	5130	4550	4280	6330	5820	4820	4370
N2	5240	4910	4060	3650	5850	4900	4050	3650
N3	4630	3850	3130	2820	4620	3850	3130	2820
N4	3720	3060	2500	2250	3710	3060	2490	2250
N5	2970	2460	2010	1830	2970	2450	2010	1830

Awning Types:




Type 0

Free-Standing
(Cp,n 0.5/0.7)

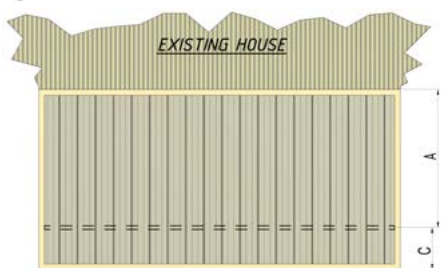


Type 1

One Side Attached
(Cp,n 0.7/0.5)

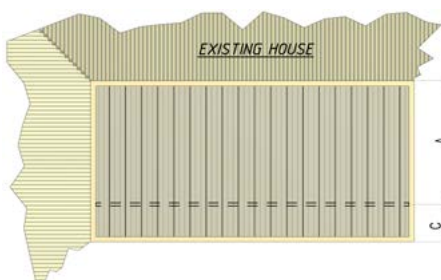


Type 2

Two Side Attached
(Cp,n 1)

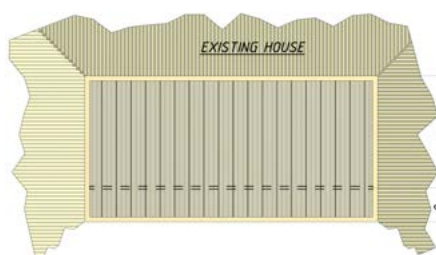

Type 3

Three Side Attached
(Cp,n 1.2)

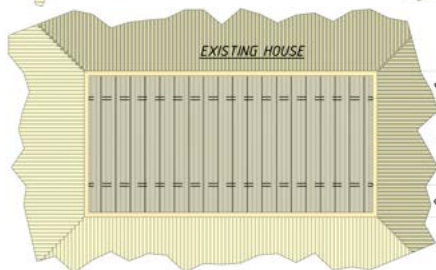

Type 4

All Sides Attached
(Cp,n 1)

Table 1 - Dimensional limits for Cp,n=0.5


hc/h	Max. hc/wc	hc/h	Max. hc/wc
<0.4	Not Allowed	0.75 to 0.8	0.71
0.4 to 0.5	No limits	0.8 to 0.9	0.45
0.5 to 0.75	1.0	0.9 to 1.0	0.33

Limits For Using Type 1P Awning Classification.


Following are the dimensional requirements for using Type 1P awning classification, which has 1 partial wall.

- For awning dimensions, refer to figure 1.
- Awning is to be attached one side only to an existing building.
- Awning pitch “ α ” is to be between 1° and 10° .
- Slope of the awning is to be normal to the attached wall.
- Minimum $h_c = 0.05 \times d$
- Maximum $h_c = 1.0 \times d$
- Maximum h_c/w_c to be as per Table 1.
- Maximum blockage under the roof parallel to the attached wall is to be 56% of the projected area.
- Awnings attached one side that do not comply with the above are to be classified as Type 1.
- Maximum $h_c = 1.0 \times d$
- Maximum h_c/w_c to be as per Table 1.
- Maximum blockage under the roof parallel to the attached wall is to be 56% of the projected area.
- Awnings attached one side that do not comply with the above are to be classified as Type 1.

Figure 1 - Roof Dimension

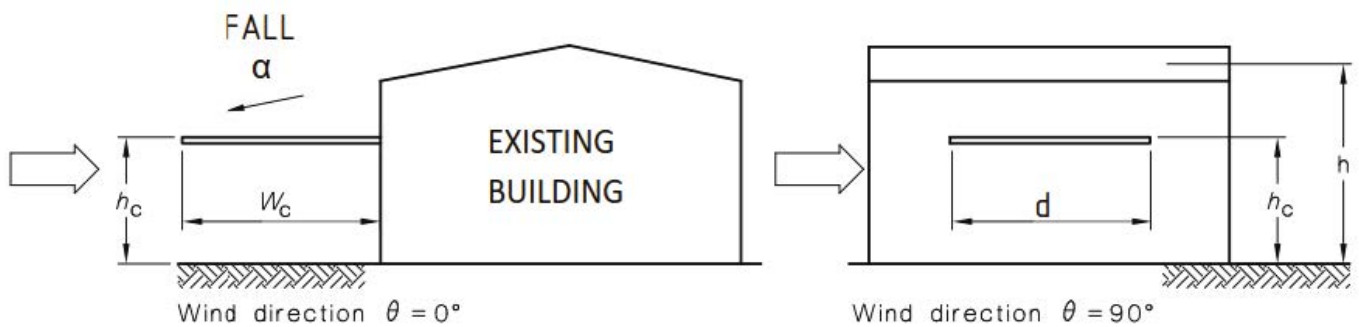

Skylights

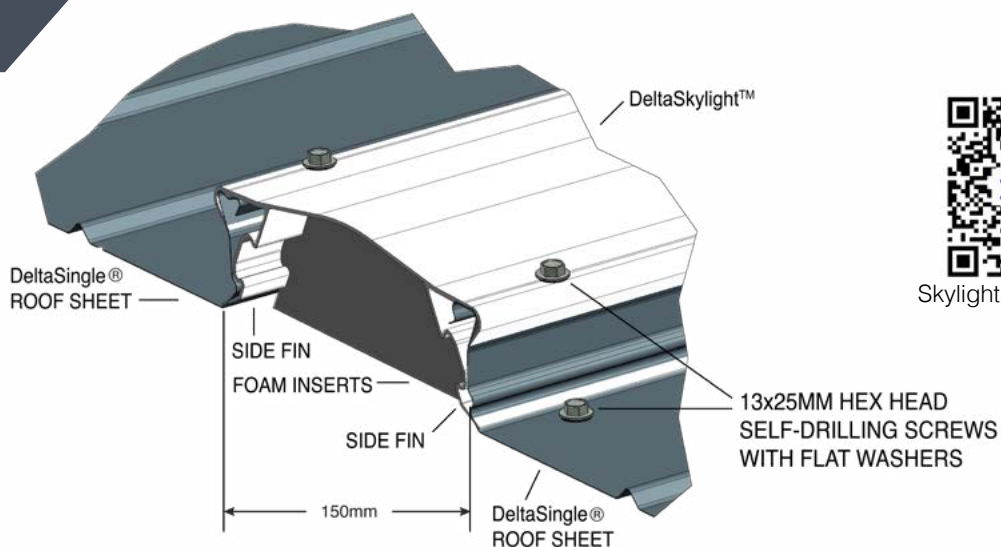

Skylights & Downlights